



## WALL PACK LIGHT SERIES



### **FEATURES**

- **Title:** LWP Wall Pack Light Series
- **Wattage:** 40W, 60W, 80W, 100W, 120W, 150W
- **Led source:** CREE XT-E
- **Driver:** MeanWell
- **LED Lumens:** 110lm/W
- **Certificate:** CE, ROHS, cETL, ETL, DLC  
(see specification chart)

**LED Lites USA LED Conversion for High-Intensity Wall Pack Downlights is the most cost-effective method for switching from older power-intensive, high-maintenance lighting to state-of-the-art LEDs that dramatically lower power and maintenance costs. Existing boxes and wiring all remain in place with only the lighting source switched to LED with a custom reflector, heat sink and lens (as pictured above). Any element such as color, intensity or illumination pattern, can be modified with an optional custom design.**


LED LITES USA [www.ledlitesusa.com](http://www.ledlitesusa.com) PHONE: +1-702-685-9524  
3395 W. Cheyenne Ave. #111 N. Las Vegas, NV 89032 Email: [sales@ledlitesusa.com](mailto:sales@ledlitesusa.com)

# WALL PACK LIGHT SERIES

## SPECIFICATIONS

Model	LWP-40W	LWP-60W	LWP-80W	LWP-100W	LWP-120W	LWP-150W
Power	40W	60W	80W	100W	120W	150W
Output Lumen	4,400	6,600	8,800	11,000	13,200	16,500
Certificate	CE, ROHS	CE, ROHS, ETL, DLC	CE, ROHS, ETL, DLC	CE, ROHS, ETL, DLC	CE, ROHS, ETL, DLC	CE, ROHS, ETL, DLC
Dimensions	14.4 x 7.67 x 9 in. 363 x 195 x 230mm		14.4 x 7.72 x 8.9 in. 366 x 196 x 226mm			
Voltage	100~277VAC    (180V-528V Optional)					
IP	65 Waterproof					
LED/Driver	LM80 CREE XT-E / MEANWELL					
Material	Die-cast aluminum + PC					
CCT	3000K~6500K					
Beam Angle	110 x 130 Degrees					
PF	>0.90					
CRI	≥75Ra					
Working Temp.	-22~140°F (-30℃~60℃)					
Life span	>50,000 Hrs					

## Luminous Intensity Distribution(C)

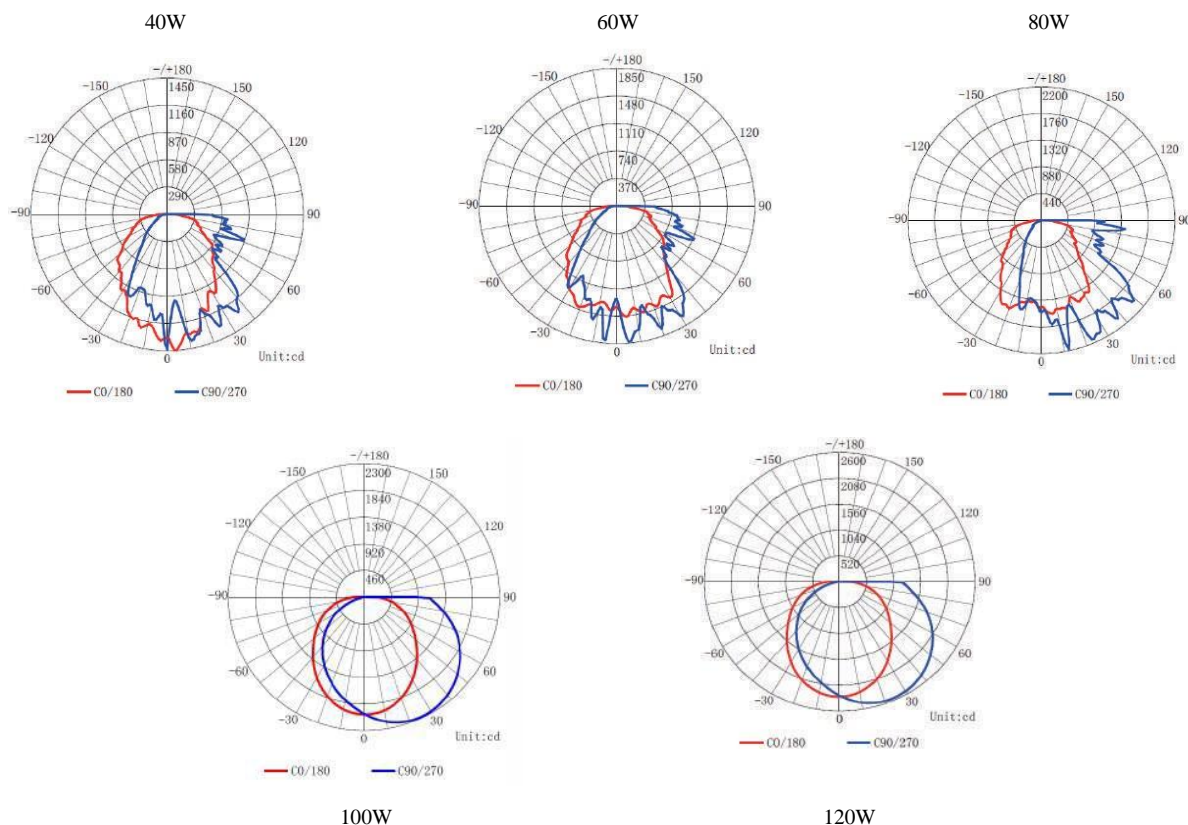

We meet all LED Lighting needs. Call or email today for any questions.

PHONE: +1-702-685-9524 Email: [sales@ledlitesusa.com](mailto:sales@ledlitesusa.com)